

What is claimed is:

1. An oil cleaning sheet for makeup, characterized by comprising a porous stretched film made of a plastic material.

2. An oil cleaning sheet for makeup according to claim 1, characterized in that the interstitial volume per unit area of said porous stretched film is in the range of 0.0001-0.005 cm<sup>3</sup> as calculated by the following equation:

interstitial volume per unit area = [film thickness (cm) x 1 (cm) x void content (%)]/100

(where the void content is the percentage of voids in the porous film).

3. An oil cleaning sheet for makeup according to claim 1, characterized in that the void content of said porous stretched film is in the range of 5-50% and the film thickness is in the range of 5-200 μm.

4. An oil cleaning sheet for makeup according to claim 1 in which at least one surface of said porous stretched film contains a hydrophilic liquid-absorbing substance which is at least partly distributed on the surface.

5. An oil cleaning sheet for makeup according to claim 4 in which said liquid-absorbing substance is distributed on the surface of said stretched film by coating the same, after said stretched film was produced.

6. An oil cleaning sheet for makeup according to claim 4 in which said liquid-absorbing substance is incorporated into said stretched film during production thereof, so that said substance is at least partly exposed in a surface of said film.

7. An oil cleaning sheet for makeup according to claim 4 in which said porous stretched film has a liquid absorption capacity, in terms of the amount of water absorbed, of 0.00003 to 0.005 cm<sup>3</sup> per unit area.

8. An oil cleaning sheet for makeup according to claim 4 in which an aqueous solution of said liquid-absorbing substance has a surface tension of 15.0 to 36.0 dyn/cm.

9. A method of removing facial oil comprising providing an oil cleaning sheet comprising a porous stretched film made of a plastic material, wherein the size of the voids is in the range of 0.2 to 5 $\mu$ m wiping a user's skin to remove skin oil wherein the oil cleaning sheet is capable of becoming more transparent upon absorption of a given amount of facial oil per unit area.

10. The method of claim 9 wherein the interstitial volume per unit area of said porous stretched film is in the range of 0.0001-0.005 cm<sup>3</sup> as calculated by the following equation:

interstitial volume per unit area = [film thickness (cm) x 1 (cm) x void content (%)]/100  
(where the void content is the percentage of voids in the porous film).

11. The method of claim 9 wherein the void content of said porous stretched film is in the range of 5-50% and the film thickness is in the range of 5-200  $\mu$ m.

12. The method of claim 9 wherein at least one surface of said porous stretched film contains a hydrophilic liquid-absorbing substance which is at least partly distributed on the surface.

13. The method of claim 9 wherein said liquid-absorbing substance is distributed on the surface of said stretched film by coating the same, after said stretched film was produced.

14. The method of claim 9 wherein said liquid-absorbing substance is incorporated into said stretched film during production thereof, so that said substance is at least partly exposed in a surface of said film.

15. The method of claim 9 wherein said porous stretched film has a liquid absorption capacity, in terms of the amount of water absorbed, of 0.00003 to 0.005 cm<sup>3</sup> per unit area.

5 16. The method of claim 9 wherein an aqueous solution of said liquid-absorbing substance has a surface tension of 15.0 to 36.0 dyn/cm.

8-

⑬ 日本国特許庁 (JP)

⑭ 実用新案出願公開

⑯ 公開実用新案公報 (U)

昭58-74894

Int. Cl.  
A 47 K 7/00  
10/42

識別記号  
1 0 1

庁内整理番号  
7151-2D  
7151-2D

公開 昭和58年(1983)5月20日

審査請求 未請求

(全 頁)

⑰ ウエットティッシュ入り袋

鎌倉市笛田1152の115

⑱ 出 願 人 東洋製糖株式会社  
東京都千代田区内幸町1丁目3  
番1号

⑲ 実 願 昭58-170229  
⑳ 出 願 昭56(1981)11月17日  
㉑ 考 案 者 伊藤和夫

㉒ 代 理 人 弁理士 世良和信

8-



## 明 細 書

### 1. 考案の名称

ウエットティッシュ入り袋

### 2. 実用新案登録請求の範囲

ウエットティッシュを内部に封入した袋体部と蓋体部を相互に重なり合うように折曲げ自在に連接し、前記袋体部の内側表面中央には開口部を遊開する被覆片をシートヒンジ部を介して起倒可能に切込み形成すると共に、前記蓋体部の内側面連所には袋体部の開口部を含む周縁区域と密圧接着する粘着シート材を設けてなるウエットティッシュ入り袋。

### 3. 考案の詳細な説明


この考案は、香料等の化粧液および消毒剤等の薬液を含浸した複数枚の繊維素材を袋内に封入して、使用時に容易に取り出せるようにしたウエットティッシュ入り袋に関するものである。

ウエットティッシュ入り袋は種々考案されている。しかし従来のものは、原状から袋体が開口していて、その開口部を気密性のない蓋で被覆さ



せたり、また開口部にシール機構を設けたものでは、そのシール機構部を平面状の開口部両面の延長により重ね合せ状に起立させたり、さらには開口部のシール機構が起立していないものでは、その開口部を袋体の四周中の一辺に設けて蓋体が省略されたりしていた。

従つて前者においては、袋体が原状から開口しているうえ、蓋に気密性がないので、ティッシュに含浸されている化粧液および薬液が経時的に蒸発し、薬効成分が減衰する。また中者においては、シール機構部が合接状の起立面に形成されているため、その起立面が積層されたティッシュの上層部に位置して、その分だけ厚みが増すことから、携帯上不便である。さらに後者においては、シール機構の開口部が袋体の四周中の一辺に設けられているので、ティッシュの最終端と開口部までの距離が長く、かつティッシュ同士の濡潤面の引張抵抗により、取り出し時間が長くなるうえ、蓋体が省略されていることから、シールの機能が減衰すると、その度合に応じて薬効性分を失うと



いう各問題点があつた。

この考案は、上記の各問題点を解決するためになされたものであり、その目的とするところは、袋の成形時に、開口部となる位置の直下にウェットティッシュを封入し、その開口部は、平面状の切り込みによる被覆片と粘着シート材付の蓋体部をもつて二重に密封することにより、完全なシール機能が発揮されてティッシュの薬効成分が維持できるうえ、2つ折りの薄状小型化が得られて携帯が便利になり、かつティッシュの中央部をつまめるようにして取り出し時間が短縮できるウェットティッシュ入り袋を提供することにある。

以下、この考案の一実施例を添付図面に基づいて説明する。

まず構成を説明すると、第1図および第2図に示すように、袋体本体Aは、気密性を有する可撓性の帯状樹脂シートを、長手方向の両端末部がシート面の中心帯Cの位置に近い他方側の面上で接合するようにして、2枚重ねになつている。せし



て中心帯 C の一方側長方形面域の内側面部中央には、あらかじめ素材シート面に対するミシン目の切り込み 3 加工によつて、開口部 5 を遮閉する方形の被覆片 4 が四周中の一辺を残す態様で形成されている。上記開口部 5 は、その直下に位置することになるウェットティッシュ 8 の単体取り出しが可能な範囲内において最小限度の面積となるように設定されている。

上記袋体本体 A は、素材シート面に対する前述した 2 枚重ねの折り曲げ時に、開口部 5 を遮閉する被覆片 4 の直下位置には、第 4 図の断面をもつて示すように、あらかじめ複数枚の繊維素材シートを積層して、このシートに香料等の化粧液および消毒剤等の薬液を通宜な配分量により含浸したウェットティッシュ 8 を収容している。そしてこのあと、中心帯 C に近い両端末部の接合位置と、3 枚重ねの両側シート縁位置とに対する加熱接着をもつて、細幅により H 字形にヒートシール部 6 の加工が施され、さらに中心帯 C に対する 2 つ折り可能な曲げ加工が施されて、上記中心帯 C の一





方側には、内部に複数のウェットティッシュユー 8 を積層状に封入した袋体部 1 が、またその他方側には、同じ面積の蓋体部 2 が、それぞれ長手方向に遮面状に形成されている。

上記袋体本体 A の他方側に配置された蓋体部 2 の内側面中央域には、この袋体本体 A を、中心帯 C の位置で 2 つ折りにしたとき、袋体部 1 の内側面中央に配置された開口部 5 を遮閉する被覆片 4 と、その周辺を、気密性のもとで完全に密封するに足りる面積をもち、かつその作用面部に感圧接着が可能となる接着剤を付した粘着シート材 7 が、一体的に固定されている。第 2 図に示す B は、袋体本体 A の 2 つ折り時に、上記粘着シート材 7 が感圧接着される接着区域である。



そして未使用時における袋体本体 A は、第 1 図および第 4 図に示すように、中心帯 C の位置で 2 つ折りにされていて、蓋体部 2 の内側面に一体的に配設されている粘着シート材 7 が、袋本体 1 の接着区域 B の面部に感圧接着されている。

前記の構成により、ウェットティッシュユー 8 は



袋体本体 A の形成時に袋体部 1 内に封入され、未使用時には、その袋体部 1 の内側面中央には開口部 5 が未だ形成されておらず、袋体部の内部は外部と完全気密の状態と遮断されているため、袋体部 1 内に封入されているウェットティッシュ 8 に含浸された薬効成分は、蒸発等が防止されて、長期にわたり蓋閉時における薬効成分の保障を維持できる。

次にウェットティッシュ 8 を使用するときは、袋体部 1 の任意縁部を指で保持しながら、蓋体部 2 の同位縁部を持ち上げると、接層区域 B に対する粘着シート材 7 の感圧接層が解除される。この時点で、被覆片 4 の 3 方周縁面に押圧力を与えることにより、ミシン目の切り込み 3 が一連状に裂けて、この位置に、被覆片 4 によつて開閉が可能となる開口部 5 が形出できる。これにより、被覆片 4 の一辺によるシートヒンジのもとで、被覆片 4 を持ち上げた開口部 5 から、第 3 図に示すように袋体部 1 内に封入されているウェットティッシュ 8 を、つまみ操作により円滑確実に取り出すこと



ができる。なおこの 合ウエットティッシュー 8 は、開口部 5 の直下位置に封入されているため、ティッシュー 8 の中央部分をつまむことになる。このように積層されたティッシューの中央部を積層方向すなわち上方へつまんで取出す場合、積層されたティッシュー同士の表面張力による引張抵抗に対して、比較的に小さな力で且つ容易迅速に取り出すことができる。

またウエットティッシュー 8 を取り出したあとは、シートヒンジにより、被覆片 4 を周辺の面部と同一面に平面化することで、開口部 5 を完全に閉塞できる。従つて袋体本体 A を再び 2 つ折りにして、蓋体部 2 を袋体部 1 側に軽く押圧すると、開口部 5 の位置は、被覆片 4 と、この被覆片 4 を含む接着区域 B に対する粘着シート材 7 との二重シール機構により、完全な気密状態を再現することができる。これにより袋体部 1 内にウエットティッシュー 8 が在中する限り、そのティッシュー 8 に含浸されている薬効成分を、最終使用時まで減衰させず維持することができる。

以上に説明したようにこの考案は、袋体本体の成形時に、袋体部側の開口部となる位置の直下にウェットティッシュを封入し、その開口部は、平面状の切り込みによる被覆片と、袋体部側に設けた粘着シート材とで、二重に密封することにより、完全なシール機能が発揮されて、ウェットティッシュに含浸した薬効成分が、最後の一枚まで常に原状をもつて維持できるうえ、被覆片の介在により、粘着シート材が内容物に直接接触れることがないため、品質の安定が得られて商品価値を高めることができる。また上記の二重シール機構は、いずれも平面状に配置されて厚みが増さないうえ、袋体本体は2つ折りに形成されているので、小型化により携帯上極めて便利な効果がある。

#### 4. 図面の簡単な説明

第1図はこの考案によるウェットティッシュ入り袋の2つ折りの状態における斜視図、第2図は同袋を2つ折りから解放した状態を示す斜視図、第3図は同袋の開口部から内容のウェットティッシュを取り出した状態を示す斜視図、第4図は



第 1 図の D-D 線における縦断面図である。

符 号 の 説 明


- |              |                 |
|--------------|-----------------|
| 1 ... 袋体部    | 2 ... 蓋体部       |
| 3 ... 切り込み   | 4 ... 被覆片       |
| 5 ... 開口部    | 6 ... ヒートシール部   |
| 7 ... 粘着シート材 | 8 ... ウエットティッシュ |
| A ... 袋体本体   | B ... 接着圧域      |
| C ... 中心帯    |                 |

実用新案登録出願人 東洋製罐株式会社


代理人 弁理士 世 良 和 信



第 1 図

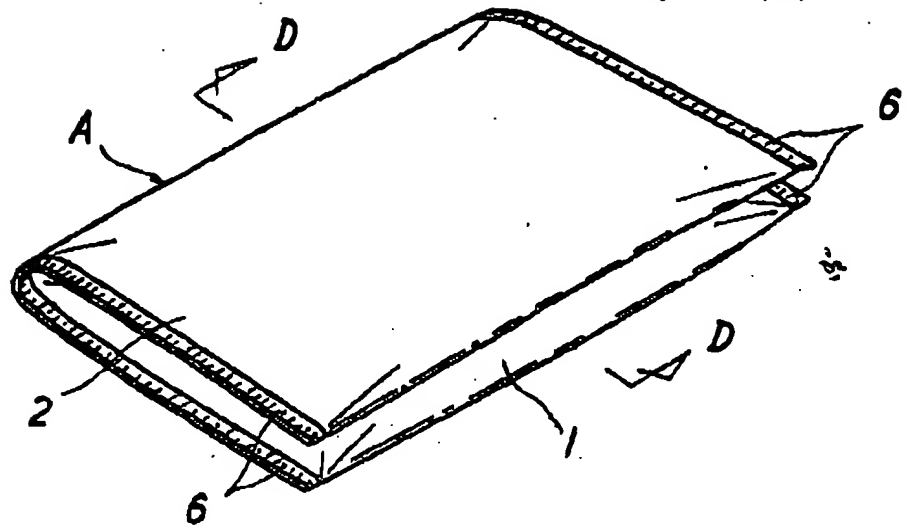

第 2 図

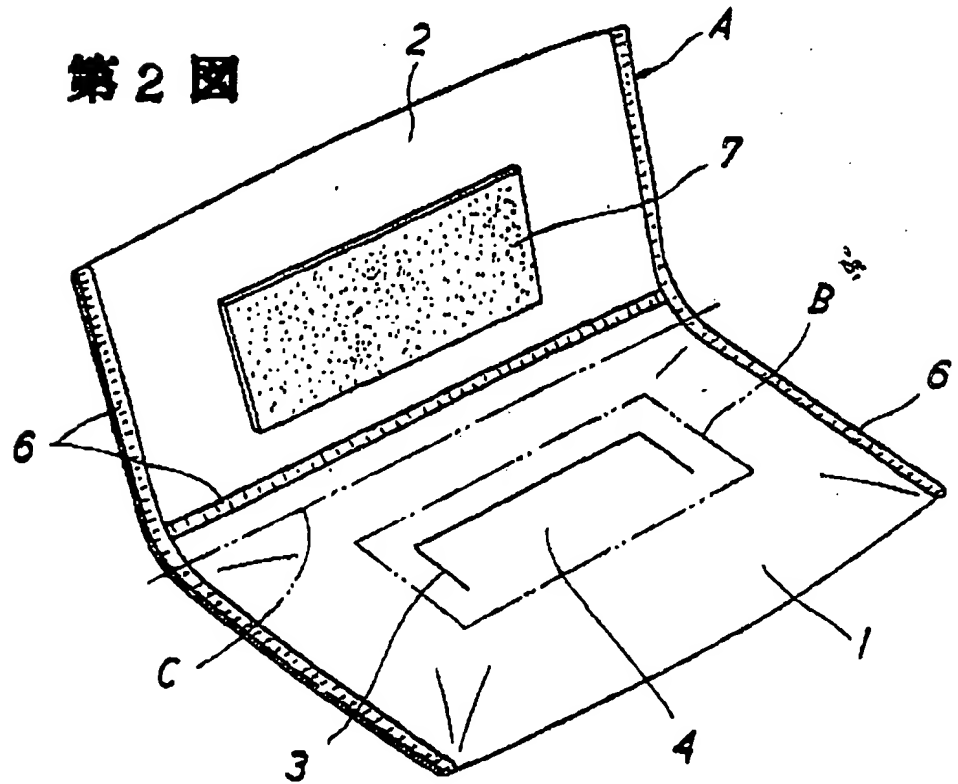


758


実開 58-7489

代理人 弁理士 世良和信

第3図

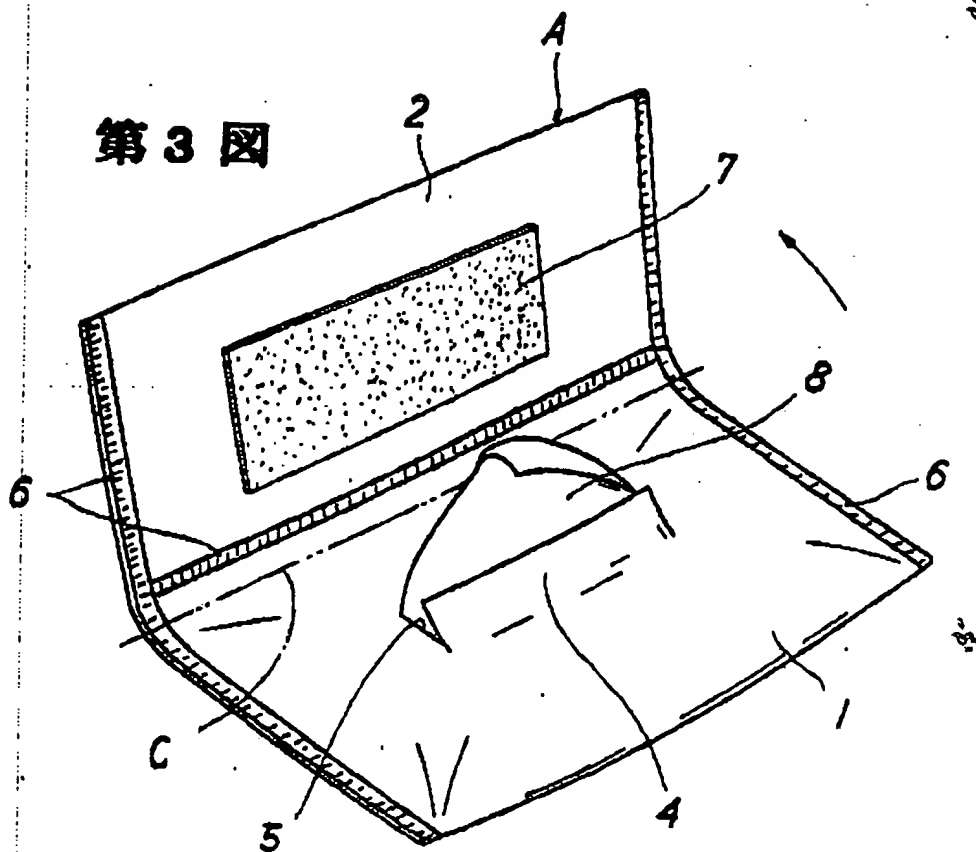

第4図

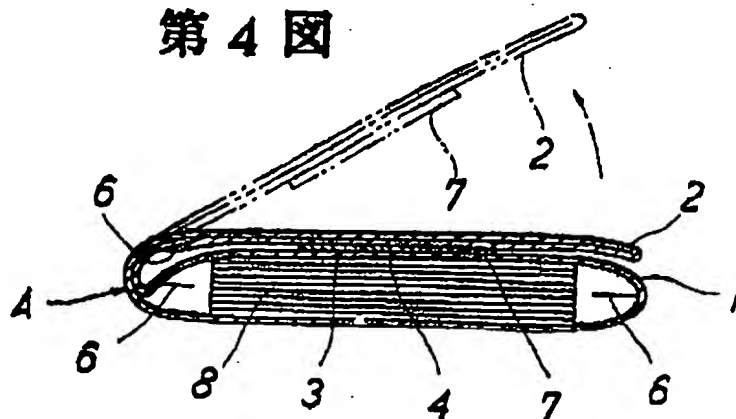

代理人 弁理士 世良和信

7524  
74894

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A47K 7/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 99/29220</b>
			(43) International Publication Date: 17 June 1999 (17.06.99)
(21) International Application Number: PCT/US98/25736		(81) Designated States: KR, <u>US</u> , European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 4 December 1998 (04.12.98)			
(30) Priority Data: 9/335451 5 December 1997 (05.12.97) JP 10/343839 3 December 1998 (03.12.98) JP		Published With international search report.	
(71) Applicant (for all designated States except US): MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			
(72) Inventors; and (75) Inventors/Applicants (for US only): KONDO, Kazunori [JP/JP]; 1-2-20, Yabe, Sagami-hara-city, Kanagawa pref. 229-0032 (JP). ETCHU, Kumiko [JP/JP]; 4-17-7-301, Kyowa, Sagami-hara-city, Kanagawa-pref. 229-0034 (JP).			
(74) Agents: BJORKMAN, Dale, A. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			
(54) Title: OIL CLEANING SHEETS FOR MAKEUP			
(57) Abstract  To provide an oil cleaning sheet for makeup which has excellent oil absorption, allows clear assessment of the oil absorbing effect by becoming transparent upon oil absorption, thus providing the user with a feeling of adequate wiping and a sense of satisfaction, has an agreeable feel, is resistant to damage during use and which does not require inclusion of particulate bodies on the surface. The oil cleaning sheet consists of a porous stretched film made of a plastic material.			



**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## OIL CLEANING SHEETS FOR MAKEUP

### FIELD OF THE INVENTION

5 The present invention relates to an oil cleaning sheet for makeup, and more specifically it relates to an oil cleaning sheet in the form of strip for wiping off skin oil (sebum) which has surfaced on the face. The oil cleaning sheet of the invention has excellent oil absorbance, allows the condition of oil to be easily assessed when applying makeup and causes little skin irritation, while its facial cleansing effect is excellent, thus facilitating application and spreading of cosmetics.

10 In addition to excellent absorption of the skin oil, notable transparency which is effective to know a level of the oil absorption and toughness, the oil cleaning sheet of the invention can absorb a large amount of sweat and skin oil dissolved therein on the face, because a surface of the sheet has a good hydrophilic property.

15

### BACKGROUND

Various types of oil cleaning sheets for makeup are well known, for wiping off oils which surface on different parts of the face, especially the nose, cheeks, forehead and eyebrows, to maintain a clean face and to facilitate application and spreading of cosmetics. When makeup is applied over oils which have surfaced on the face, the cosmetic material fails to properly adhere to the skin, thus impeding its spreading and preventing adequate performance of the effect of the makeup. An additional effect can be exhibited after makeup is applied, to prevent crumbling of the makeup or "oily appearance", by using oil cleaning sheets to wipe off oils which constantly surface on the skin after application of makeup.

25

The most widely used type of oil cleaning sheets among the many kinds of oil cleaning sheets are those obtained by making paper from oil absorbing plant fibers such as hemp or synthetic pulp. Sheets made from these paper materials, however, while having high oil absorption, also have a disadvantage of high irritation to skin as a result of the hardness and surface roughness of the fiber materials used. In order to overcome this irritation to the skin, high-compression

30

roller pressing is carried out during production of the oil cleaning sheets, or the surface of the paper may be coated with an inorganic powder such as calcium carbonate powder along with a sizing agent. However, in the former case there is again the disadvantage of skin irritation, because the fibers smashed by the roll pressing become raised over time, while in the latter case a disadvantage results in that the surface of the paper becomes covered with the sizing agent, unavoidably lowering the oil absorbing power.

Japanese Unexamined Utility Model Publication (Kokai) No. 4-45591 is aimed particularly at solving the problems caused by roll pressing during production of oil cleaning sheets and by coating of paper surfaces with inorganic powders such as calcium carbonate powder, and it teaches adhesion of porous globular beads onto the surface of oil cleaning sheets. According to this proposal, adhesion of porous globular beads onto the surface of oil cleaning sheets. According to this proposal, adhesion of porous globular beads provides an effect of allowing efficient absorption of skin oils.

Also, Japanese Unexamined Patent Publication (Kokai) No. 6-319664 teaches improvement in skin oil absorption by adding (B) an inorganic filler to (A) a raw pulp material composed mainly of plant fiber for preparation of a paper making material, to make sheets with a paper hardness of at least  $0.7 \text{ (g/cm}^2\text{)}$ .

The oil cleaning sheets produced by the methods taught in these publications are effective at reducing irritation to skin during their use. However, the improvement in skin oil absorption with these oil cleaning sheets is limited, and further improvement is therefore desired. These oil cleaning sheets also have an additional problem in that the state of oil absorption of skin oils, i.e. the wiping effect cannot be easily and accurately assessed during their use. The difficulty in assessing the wiping effect means that the user cannot achieve satisfaction by the removal of skin oils from the face. That is, from the point of view of the user, it is a very important evaluating factor to determine whether and how much skin oils have been removed from the face of the user when the oil cleaning sheets are used, and therefore satisfaction with makeup application varies greatly depending on this factor.

There also exist publicly known oil cleaning sheets for makeup which especially focus on allowing easy assessment of the wiping effect on skin oils, as discussed above. For example, Japanese Examined Patent Publication No. 56-8606 teaches an oil cleaning sheet for makeup which is characterized by mixture of  
5 hemp fibers with polyolefin resin fibers in an amount of 10-70% by weight and preparation of sheets with a density of 12-50 g/cm<sup>2</sup>. Because these oil cleaning sheets have a construction with transparent-like polyolefin fibers mixed with non-transparent hemp fibers, the hemp fibers which are non-transparent prior to use exhibit a transparent-like property upon absorption of oil, thus allowing the skin oil  
10 wiping effect to be clearly assessed.

In addition, Japanese Unexamined Utility Model Publication (Kokai) No. 5-18392 discloses oil cleaning sheets characterized in that inorganic or organic particulate bodies such as clay particles, fine silica particles, fiber powder or the like are added to oil cleaning paper to form a smooth side on the surface of the oil  
15 cleaning paper. Since these oil cleaning sheets contain particles in the gaps between the fibers of the oil cleaning paper, skin oils moisturize the entirety of the oil cleaning sheet while also filling the gaps between the paper fibers and the particles, providing an effect of rendering the oil cleaning paper even more transparent, i.e., giving the user a "satisfaction that skin oil has been removed".

Nevertheless, although the 2 types of oil cleaning sheets mentioned above exhibit certain degrees of effects of transparency by oil absorption and assessment of oil absorption thereby, as a drawback they have a reduced amount of oil absorption which is the most important aspect for oil cleaning sheets, and it is difficult to achieve full transparency of the oil cleaning sheets upon oil absorption.  
20 Consequently, there still remains a demand for oil cleaning sheets with even greater oil absorption which can also be rendered transparent to give adequate satisfaction to users.

Another problem which is common to conventional oil cleaning sheets arises from the fact that they are made from paper types produced as thin paper  
30 from fiber materials, and thus they tend to be easily damaged when the user employs them to wipe skin oils from the face and must be immediately replaced.

Because of the high cost of commercially available oil cleaning sheets, it is desirable to provide tougher oil cleaning sheets which do not need such immediate replacement.

5 In addition to the above problems, the prior art oil cleaning sheets suffer from another problem in the summer season and in an air-conditioned room under the highly increased temperature, because under such conditions, the oil cleaning sheets are insufficient to completely remove the sweat from the face surface. The unremoved sweat further causes insufficient compatibility and adhesion of the cosmetic material to the skin, because the sweat contains skin oil dissolved therein.  
10 It is therefore desired to provide an oil cleaning sheet having an excellent absorption capacity of liquid including sweat, in addition to excellent oil absorption capacity and other advantages.

#### DETAILED DESCRIPTION OF THE INVENTION

15 The present invention has been accomplished in the light of the many problems with conventional oil cleaning sheets for makeup which have been discussed above, and its object is that of providing an improved oil cleaning sheet for makeup which has excellent oil absorption, is resistant to damage during use, allows clear assessment of the oil absorbing effect by becoming transparent upon  
20 oil absorption to thus provide the user with a feeling of adequate wiping and a sense of satisfaction, has an agreeable feel, and which does not require inclusion of particulate bodies on the surface for improved characteristics.

Another object of the present invention is to provide an improved oil cleaning sheet for makeup which enables to absorb a large amount of sweat on the  
25 face and skin oil and the like dissolved in the sweat, in addition to ensuring excellent absorption of the skin oil, notable transparency capable of indicating a level of the oil absorption and toughness.

According to the present invention, the above-mentioned object may be achieved by an oil cleaning sheet for makeup characterized by comprising a porous  
30 stretched film made of a plastic material.

The porosity of the interstitial volume per unit area stretched film made of a plastic material as a constituent of the oil cleaning sheet for makeup according to the invention is preferably in the range of  $0.0001\text{--}0.005\text{ cm}^3$  as calculated by the equation:

5 Interstitial volume per unit area = [film thickness (cm) x 1 (cm) x 1 (cm) x void content (%)] / 100 (where the void content is the percentage of voids in the porous film).

10 The "void content" is more specifically defined as the percentage of an amount of filling material, when all of the voids of the porous film are filled with a material of the same composition as the film, with respect to a film with no corresponding voids.

The void content of the porous stretched film is preferably in the range of 5-50% and the film thickness is preferably in the range of  $5\text{--}200\mu\text{m}$ .

15 Further, in the oil cleaning sheet of the present invention, it is preferred that at least one surface of the porous stretched film contains a hydrophilic liquid-absorbing substance which is at least partly distributed on the surface.

20 The distribution of the liquid-absorbing substance on the film surface can be provided in any desired step during production of the stretched film. Preferably, the liquid-absorbing substance is distributed on the surface of the stretched film by coating the same, after production of the film. Alternatively, the liquid-absorbing substance is preferably incorporated into the stretched film during production thereof, so that said substance is at least partly exposed in a surface of the film, thereby ensuring the desired functions and effects. The liquid-absorbing substance may be incorporated into a raw material or mixture of the film or an intermediate product of the film, for example.

25 In the above-described stretched film having the distributed liquid-absorbing substance, it is preferred that the stretched film has a liquid absorption capacity, in terms of the amount of water absorbed, of  $0.00003\text{ to }0.005\text{ cm}^3$  per unit area. It is also preferred that an aqueous solution of the liquid-absorbing substance distributed on a surface of the stretched film has a surface tension of 15.0 to 36.0 dyn/cm.

The oil cleaning sheet for makeup according to the invention is characterized by employing as the paper body a plastic material as opposed to paper material such as used in conventional oil cleaning sheets, and preparing a porous stretched film with that material. The porous stretched film of the invention  
5 may be produced by various different methods using the plastic material as the starting substance, but preferably it is produced by various different methods using the plastic material as the starting substance, but preferably it is produced by adding a filler to a highly transparent crystalline thermoplastic resin as the starting material for film making to prepare a plastic film, and then stretching the film to  
10 crate fine voids therein.

The porous stretched plastic film obtained in this manner has a larger percentage of voids constituting the volume of the sheet compared to conventional oil cleaning sheets, and therefore it has excellent absorption of skin oils on the skin absorption per unit area. Also, since the plastic film has a structure with a uniform  
15 content of many fine voids, prior to wiping of skin oils from the skin surface it appears non-transparent due to light dispersion, but after oil absorption the oils fill each of the voids thus either preventing or reducing the degree of light dispersion, and this together with the original transparent nature of the film body allows the oil absorbing effect to be clearly assessed.

Preferred examples of highly transparent crystalline thermoplastic resins to be used as the main starting material for production of the porous unstretched plastic film of the invention include, but are not limited to, high density polyethylene, polypropylene, polybutylene, poly-4-methylpentene and ethylene-propylene block copolymer, while modified polypropylene is ideal because of its  
20 melt strength for film making.  
25

Preferred examples of fillers to be used in combination with the aforementioned thermoplastic resin to provide the fine voids include, but are not limited to, mineral oils, glycerin, petroleum jelly, low molecular weight polyethylene, polyethylene oxide, polypropylene oxide, polytetramethylene oxide,  
30 soft Carbowax and mixtures thereof, because these exhibit transparency upon

absorption of oil. Mineral oils are preferred among these fillers because of their relatively low cost.

The aforementioned fillers can be varied within a wide range in the starting material used for production of the film. The amount of filler to be used is preferably in the range of 20-60% by weight, and more preferably 25-40% by weight of the starting material. If the amount of filler added to the starting material is under 20% by weight, the void content of the film resulting after stretching is reduced, thus lowering the amount of oil absorption, while if it is above 60% by weight it becomes more difficult to produce films, and only brittle films can be obtained.

Other additives may also be added as necessary in addition to the thermoplastic resin and filler in the main starting material for production of the porous stretched plastic film. For example, organic acids such as carboxylic acid, sulfonic acid and phosphonic acid, and organic alcohols. As additional suitable additives there may be mentioned, for example, inorganic and organic pigment, aromatic agents, surfactants, antistatic agents and the like.

The main starting material and optional additives are melted and combined to form a film, producing a filler-containing plastic film. The melting and mixing step and the subsequent film forming step may be carried out according to common methods. An example of a suitable melt mixing method is kneading with a kneader, and examples of suitable film forming methods are the inflation method and the casting method. The inflation method, for example, can give tube-shaped films by melt mixing the main starting material, etc. and then blowing it up from a circular die. The casting method can give films by melt mixing the main starting material, etc. and then extruding it from a die on a chilled roll (cold roll). In a modified form of this casting method, the additives may be removed by washing off with a suitable solvent after extrusion of the melted mixture on the chilled roll.

The formed plastic film is then stretched to provide it with fine voids. As with the film forming, the stretching may also be carried out according to common methods, such as uniaxial stretching or biaxial stretching. For example, in the case of biaxial stretching, the stretching in the lengthwise direction may be



accomplished by varying the speed of the driving roll, and the stretching in the widthwise direction may be accomplished by mechanical pulling in the widthwise direction while holding both ends of the film with a chuck.

The conditions for the film stretching are not particularly restricted, but the stretching is preferably carried out so as to give a void content in the range of 5-50% and a stretched film thickness in the range of 5-200  $\mu\text{m}$ . If the void content upon stretching of the film is under 5% the amount of oil absorption will be reduced, while if it is over 50% the amount of oil absorption will be too great, making it difficult to clearly assess the oil absorbing effect. Also, if the film thickness is under 5  $\mu\text{m}$  the amount of oil absorption will be too low and the film will tend to adhere to areas of the face which require no removal of oils, making it more difficult to handle, while if it is over 200  $\mu\text{m}$  the amount of oil absorption will be too great.

The stretching ratio for the plastic film is usually preferred to be in the range of 1.5 to 3.0. If the stretching ratio is under 1.5 it becomes impossible to achieve a sufficient void content for oil absorption, while if it is over 3.0 the void content becomes too large, causing too much oil absorption.

The size of the voids formed by stretching of the film is usually preferred to be in the range of 0.2 to 5  $\mu\text{m}$ . If the void size is under 0.2  $\mu\text{m}$  it becomes impossible to absorb enough skin oil to create transparency, while if it is over 5  $\mu\text{m}$  the amount of oil absorption will be too great.

As mentioned above, the interstitial volume per unit area of the porous stretched plastic film obtained by the stretching process described earlier is preferably in the range of 0.0001-0.005  $\text{cm}^3$ , and more preferably in the range of 0.0002-0.001  $\text{cm}^3$ , as calculated by the equation defined above. If the interstitial volume of the film is under 0.0001  $\text{cm}^3$  it becomes difficult for the user to hold the oil cleaning sheet, while if it is over 0.005  $\text{cm}^3$  the amount of oil absorption is too great, and it becomes difficult to clearly assess the oil absorbing effect.

As described above, the oil cleaning sheet for makeup of the present invention can provide many advantages such as excellent absorption of skin oil, notable transparency enabling easy confirmation of oil absorption and toughness.

However, since it is made of a plastic material, if it is compared with the prior art oil cleaning sheet made of paper, the present oil cleaning sheet suffers from the difficulty in effectively absorb the water-based liquid such as sweat. As a result of  
5 zealous examination, the inventors have found that a poor sweat absorption is principally due to a hydrophobic surface of the plastic film and accordingly if a hydrophilic property is given to the plastic film, it becomes to easily absorb the sweat on the face and the skin oil dissolved in the sweat.

That is, according to one preferred embodiment of the present invention, there is provided an oil cleaning sheet for makeup having an excellent hydrophilic  
10 property in which at least one surface of said porous stretched film contains a hydrophilic liquid-absorbing substance which is at least partly distributed on the surface.

The distribution of the hydrophilic liquid-absorbing substance in the hydrophilic oil cleaning sheet of the present invention is generally in such a state  
15 that fine particles of the liquid-absorbing substance is substantially uniformly dispersed in a surface of the porous stretched film. Further, since many different methods may be used to apply the liquid-absorbing substance to the film surface, if necessary, the liquid-absorbing substance may be also contained in the film. Furthermore, the liquid-absorbing substance may be distributed only on a single  
20 surface of the stretched film, if the oil cleaning sheet is designed to utilize such a single surface, or, alternatively, the substance may be distributed on both surfaces of the stretched film.

The application of the liquid-absorbing substance to the stretch film can be carried out by using different methods. For example, after production of the  
25 stretched film, the liquid-absorbing substance can be advantageously applied to a surface of the film by using a coating method. According to this coating method, for example, after the liquid-absorbing substance is dissolved in a suitable solvent, the resulting coating solution can be coated at a thinner thickness on a single or both surfaces of the stretched film, followed by drying the coating to remove the  
30 solvent therefrom, to thereby obtain the desired hydrophilic oil cleaning sheet.

The hydrophilic liquid-absorbing substance which can be advantageously used in the practice of the present invention, although it is not restricted to the specific one insofar as it can provide the expected functions and effects, is preferably a surface active agent. This is because, for the present invention, when the liquid (liquid droplets) such as sweat on the face is wiped with the oil cleaning sheet, it is necessary to reduce a surface tension of the liquid droplets as a function of the inclusion of the liquid-absorbing substance in the liquid droplets, and to satisfy the above requirement, the presence of a substance capable of showing a high surface activity at a low concentration, i.e., surface active agent, is effective.

Note in this connection that, as described above, a wide variety of additives may be added to starting material during production of the plastic film and typical examples thereof include a surface active agent, however, for this instance, the surface active agent is not used to give an excellent hydrophilic property to the film surface, but, to assist in good dispersion of the starting materials in the kneadering step.

The surface active agent suitable as the hydrophilic liquid-absorbing substance, although it is not restricted to, includes, for example:

Anionic surface active agent:

esters of alkylsulfuric acid,  
alkylbenzenesulfonates, esters of polyoxyethylene  
alkylphosphoric acid, and the like;

nonionic surface active agent 9:

polyoxyethylene alkylethers, esters of sorbitan aliphatic acid, and  
the like;

cationic surface active agent;

alkylamine salts,  
quaternary ammonium salts, and the like; and  
hydrophilic polymer;

polyvinyl alcohol, polyethylene glycol, polypropylene glycol and  
the like.

Among the above-described surface active agents, esters of sorbitan aliphatic acid, typically sorbitan monolaurate can be particularly advantageously used, because they have good capability of providing a hydrophilic property in the film surface, along with a safety to the skin.

5           When the hydrophilic liquid-absorbing substance is used to prepare a coating solution, suitable solvents, although they are not restricted to, include, for example, isopropyl alcohol, ethanol, water, methylethylketone, toluene, ethyl acetate, heptane and the like. Among these solvents, isopropyl alcohol can be particularly advantageously used, because the liquid-absorbing substance can be  
10           dissolved therein at a high solubility, along with a high volatility of isopropyl alcohol.

          The concentration of the liquid-absorbing substance in the coating solution may be widely varied depending upon the type or degree of the surface activity of the surface active agent used, desired effects and other factors. Generally, the  
15           concentration of the liquid-absorbing substance is preferably the amount sufficient to ensure that the stretched film has a liquid absorption capacity, in terms of the amount of water absorbed, of 0.00003 to 0.005 cm<sup>3</sup> per unit area. The liquid absorption capacity out of the above scope will not ensure a satisfactory sweat absorption effect in the resulting oil cleaning sheet. Note that the above preferred  
20           range of the liquid absorption capacity can be similarly applied to all the oil cleaning sheets of the present invention.

          In addition, an aqueous solution of the liquid-absorbing substance distributed on a surface of the stretched film preferably has a surface tension of 15.0 to 36.0 dyn/cm. The surface tension out of the above-described range will not  
25           ensure a satisfactory sweat absorption effect in the resulting oil cleaning sheet and also not ensure an effective utilization of the transparency which is provided in the oil cleaning sheet as a result of absorption of sweat and oil cleaning, for evaluating a level of such effects.

          In the coating of a coating solution onto the stretched film, the coating  
30           operation can be carried out in accordance with the conventional methods. Suitable coating methods include, for example, gravure coating, flexocoating,

screen coating, dip coating and spray coating. A coverage of the coating solution on a surface of the stretched film may be widely varied depending upon the type and surface activity of the liquid-absorbing substance used, desired effects and other factors, and generally its satisfactory coverage is in the range of about 0.1 to 3 g/m<sup>2</sup>.

In the production of the oil cleaning sheet of the present invention, an incorporation method in which the liquid-absorbing substance is incorporated into the stretched film during its production may be used in place of the above-described coating method. For example, in the production of the stretched film, when the starting materials such as the thermoplastic resin, filler, organic nucleating agent and the like are melted and blended, the liquid-absorbing substance may be also blended at any desired timing to produce the desired hydrophilic oil cleaning sheet. In this method, the liquid-absorbing substances described in the above paragraph concerning application of the liquid-absorbing substance by coating may be also used, and the amount of the liquid-absorbing substance to be incorporated is suitably the amount sufficient to ensure the above-described liquid absorption capacity. For this incorporation method, among the many usable liquid-absorbing substances, diethanol amides laurate and the like may be particularly used because of their good resistance to heat and their good hydrophilic property.

## EXAMPLES

The present invention will not be explained in further detail by way of examples. In the following examples, the term "parts" refers to "parts by weight" unless otherwise specified. It is also to be understood that the invention is in no way limited to these examples.

### Example 1

The following starting material was melt mixed in the amounts listed.

Polypropylene resin (available from Union Carbide Co. under trade name "5D45")	63.3 parts
Mineral oil (available from Amoco Oil & Chemical Co. under trade name "White Mineral oil #31")	34.0 parts
Organic nucleating agent (available from Hoechst Celanese under trade name "Blue P-526")	2.75 parts

The melt mixture was then cast from an extrusion die onto a cold roll to form a film. The resulting film was subjected to biaxial stretching (180% in lengthwise direction, 180% in widthwise direction). A porous stretched plastic film was obtained having the following characteristics.

Film thickness	0.0035 cm
Void content	25%
Interstitial volume per unit area	0.000875 cm <sup>3</sup>

The resulting porous film was cut into a rectangle of 9 cm length x 6 cm width to make a test film which was subjected to quality evaluation with regard to (1) oil absorption, (2) transparency after use and (3) feel of the film, according to the following methods.

(1) Evaluation of oil absorption

After measuring the weight (mg) of the test film, it was impregnated with commercially available mineral oil. After standing for one minute, the residual oil on the surface of the film was wiped off with a paper towel and the weight (mg) of the test film was measured again. The change in the weight of the film due to impregnation of the mineral oil was used to determine the amount of absorption per unit area (mg/cm<sup>2</sup>) and the theoretical absorption (amount of absorption when all of the interstitial of the film are filled with mineral oil, mg/cm<sup>2</sup>).

(2) Transparency after use

Test films were used as oil cleaning sheets for makeup in a monitoring test with 20 panelists. After use, the films with very excellent transparency were assigned as excellent (⊕), those with good transparency were assigned as good

(○), those with acceptable transparency were assigned as fair (Δ) and those which were stiff with an inferior feel were assigned as poor (x).

The results of each of the evaluation tests were as follows.

Film weight (before oil absorption)	121 mg
Film weight (after oil absorption)	174 mg
Change in weight (increase)	53 mg
Oil absorption per unit area	0.98 mg/cm <sup>2</sup>
Theoretical absorption	0.73 mg/cm <sup>2</sup>
Transparency after use	Excellent (⊙)
Feel	Excellent (⊙)

As these results demonstrate, the porous stretched plastic film of this example was highly suitable as an oil cleaning sheet for makeup. There was also no tearing of the film during the evaluation tests.

#### Example 2

The method described in Example 1 was repeated. For this example, however, the following starting material was melt mixed in the amounts listed.

Polypropylene resin (available from Union Carbide Co. under trade name "SD45")	62.0 parts
Mineral oil (available from Amoco Oil and Chemical Co. under trade name "White Mineral Oil #31")	35.0 parts
Pigment (available from PMS Consolidate Co. under trade name "18P805 Blue Pigment")	3.0 Parts
Organic nucleating agent (available from Milliken Chemical Co. under trade name "Millad 3905")	0.08 part

In this example, the porous stretched plastic film was prepared using the inflation method instead of the casting method of Example 1, and a tube shaped film was made by blowing-up the melted moisture from a circular die, which film was then cut into 2 sheet-like films. Each resulting film was then subjected to uniaxial stretching (160% in lengthwise direction).

The characteristics of the resulting porous stretched plastic film and the results of each of the evaluation tests were as follows.

Film thickness	0.0035 cm
Void content	20%
Interstitial volume per unit area	0.0007 cm <sup>3</sup>

	Film weight (before oil absorption)	172 mg
	Film weight (after oil absorption)	211 mg
	Change in weight (increase)	39 mg
	Oil absorption per unit area	0.72 mg/cm <sup>2</sup>
5	Theoretical absorption	0.59 mg/cm <sup>2</sup>
	Transparency after use	excellent (©)
	Feel	excellent (®)

As these results demonstrate, the porous stretched plastic film of this example was highly suitable as an oil cleaning sheet for makeup. There was also  
 10 no tearing of the film during the evaluation tests.

### Example 3

The method described in Example 1 was repeated. For this example, however, the following starting material was melt mixed in the amounts listed.

Polypropylene resin (available from Union Carbide Co. under trade name "DX5E98")	79.0 parts
Mineral oil (available from Amoco Oil and Chemical Co. under trade name "White Mineral Oil #31")	21.0 parts
Organic nucleating agent (available from Milliken Chemical Co. under trade name "Millad 3905")	0.09 part

15 In this example, the porous stretched plastic film was prepared using the inflation method instead of the casting method of Example 1, and a tube-shaped film was made by blowing-up the melted mixture from a circular die, which film was then cut into 2 sheet-like films. Each resulting film was then subjected o  
 uniaxial stretching (160% in lengthwise direction).

20 The characteristics of the resulting porous stretched plastic film and the results of each of the evaluation tests were as follows.

	Film thickness	0.0075 cm
	Void content	20%
	Interstitial volume per unit area	0.0015 cm <sup>3</sup>
25	Film weight (before oil absorption)	281 mg
	Film weight (after oil absorption)	338 mg
	Change in weight (increase)	57 mg



Oil absorption per unit area	1.06 mg/cm <sup>2</sup>
Theoretical absorption	1.26 mg/cm <sup>2</sup>
Transparency after use	fair ( $\Delta$ )
Feel	good ( $\bigcirc$ )

5 As these results demonstrate, the porous stretched plastic film of this example was usable as an oil cleaning sheet for makeup, although its properties were inferior to those of the films of Examples 1 and 2 above. There was also no tearing of the film during the evaluation tests.

#### Example 4

10 This example was carried out as a comparative example.

The method described in Example 1 was repeated. For comparison in this example, however, the following starting material was melt mixed in the amounts listed.

Polyethylene resin (available from Fina Oil and Chemical Co. under trade name "Fina 1285") 38.0 parts

Mineral oil (available from Witco Co. under trade name "Witco Protol")  
62.0 parts

In this example, the porous stretched plastic film was prepared using a modified casting method instead of the casting method of Example 1. Specifically,  
20 a film was made by casting the melted mixture from an extrusion die onto a cold roll, and then dissolving off the mineral oil with an organic solvent. The resulting film was then subjected to biaxial stretching (240% in lengthwise direction, 280% in widthwise direction).

25 The characteristics of the resulting porous stretched plastic film and the results of each of the evaluation tests were as follows.

Film thickness	0.005 cm
Void content	75%
Interstitial volume per unit area	0.004 cm <sup>3</sup>
Film weight (before oil absorption)	65 mg
30 Film weight (after oil absorption)	269 mg
Change in weight (increase)	204 mg

Oil absorption per unit area	3.78 mg/cm <sup>2</sup>
Theoretical absorption	3.14 mg/cm <sup>2</sup>
Transparency after use	fair ( $\Delta$ )
Feel	good ( $\bigcirc$ )

5 As these results demonstrate, the porous stretched plastic film obtained in this example was usable as an oil cleaning sheet for makeup, although its properties were inferior to those of the films of Examples 1 and 2 above.

#### Example 5

This example was carried out as a comparative example.

10 The method described in Example 1 was repeated. For comparison in this example, however, the following starting material was melt mixed in the amounts listed.

Polypropylene resin (available from Shell Chemical Co. under trade name "DS SD45")	30.0 parts
Mineral oil (available from Amoco Oil and Chemical Co. under trade name "White Mineral Oil #31")	70.0 parts
Organic nucleating agent (available from Milliken Chemical Co. under trade name "Millad 3905")	0.08 part

In this example, the porous stretched plastic film was prepared using a modified casting method instead of the casting method of Example 1. Specifically,  
 15 a film was made by casting the melted mixture from an extrusion die onto a cold roll, and then dissolving off the mineral oil with an organic solvent. The resulting film was then subjected to biaxial stretching (180% in lengthwise direction, 270% in widthwise direction).

20 The characteristics of the resulting porous stretched plastic film and the results of each of the evaluation tests were as follows.

Film thickness	0.011 cm
Void content	84%
Interstitial volume per unit area	0.00924 cm <sup>3</sup>
Film weight (before oil absorption)	90 mg
25 Film weight (after oil absorption)	550 mg
Change in weight (increase)	460 mg

Oil absorption per unit area	3.52 mg/cm <sup>2</sup>
Theoretical absorption	7.74 mg/cm <sup>2</sup>
Transparency after use	poor (✕)
Feel	good (○)

5 As these results demonstrate, the porous stretched plastic film obtained in this example was usable as an oil cleaning sheet for makeup, although assessment of its effect was very difficult and its properties were inferior to those of the film of Examples 1 and 2 above.

#### Example 6

10 This example was carried out as a reference example.

For reference, the 3 different oil cleaning sheets for makeup described below (commercially available) were provided for quality evaluation by the methods described in Example 1. The characteristics of the oil cleaning sheets for makeup and the results of each of the evaluation tests were as follows. Oil

#### cleaning sheet for makeup by Y Co. (gold foil embossed sheet)

15	Sheet thickness	0.0052 cm
	Void content	--
	Interstitial volume per unit area	--
	Film weight (before oil absorption)	121 mg
20	Film weight (after oil absorption)	136 mg
	Change in weight (increase)	15 mg
	Oil absorption per unit area	0.27 mg/cm <sup>2</sup>
	Theoretical absorption	--
	Transparency after use	good (○)
25	Feel	fair (Δ)

#### Oil cleaning sheet from makeup by K Co. (natural plant fiber)

	Sheet thickness	0.0025 cm
	Void content	--
	Interstitial volume per unit area	--
30	Film weight (before oil absorption)	86 mg
	Film weight (after oil absorption)	104 mg

	Change in weight (increase)	18 mg
	Oil absorption per unit area	0.33 mg/cm <sup>2</sup>
	Theoretical absorption	--
	Transparency after use	good (○)
5	Feel	good (○)

Oil cleaning sheet for makeup by S. Co. (100% natural pulp, containing natural manila hemp)

	Sheet thickness	0.0002 cm
	Void content	--
10	Interstitial volume per unit area	--
	Film weight (before oil absorption)	83 mg
	Film weight (after oil absorption)	100 mg
	Change in weight (increase)	17 mg
	Oil absorption per unit area	0.31 mg/cm <sup>2</sup>
15	Theoretical absorption	--
	Transparency after use	good (○)
	Feel	good (○)

As these results demonstrate, the oil cleaning sheets for makeup in this example which were tested for reference were usable as oil cleaning sheets for makeup, but their properties were inferior to those of the films of Examples 1 and 2 above.

Example 7

The following starting material was melt mixed in the amounts listed.

Polypropylene resin (available from Union Carbide Co. under trade name "SD45")	36.3 parts
Mineral oil (available from Amoco Oil and Chemical Co. under trade name "White Mineral Oil #31")	34.0 parts
Organic nucleating agent (available from Hoechst Celanese under trade name "Blue P-526")	2.75 part

The melt mixture was then cast from an extrusion die onto a cold roll to form a film. The resulting film was subjected to biaxial stretching (180% in

lengthwise direction, 180% in widthwise direction). A porous stretched plastic film was obtained.

Next, "Leodoluper L-10(F)", surface active agent commercially available from Kao Co., was dissolved in isopropyl alcohol to prepare a coating solution containing 5% by weight of the surface active agent. The obtained coating solution was coated on a surface of the porous film produced in the above step by using a gravure roll coater (180 lines) and dried. The coated porous film had the following characteristics.

	Film thickness	0.0035 cm
10	Void content	25%
	Interstitial volume per unit area	0.000875 cm <sup>3</sup>

The resulting porous film was cut into a rectangle of 9 cm length x 6 cm width to make a test film which was subjected to quality evaluation with regard to (1) oil absorption and (2) water absorption, according to the following methods.

15 (1) Evaluation of oil absorption

After measuring the weight (mg) of the test film, it was impregnated with commercially available mineral oil. After standing for one minute, the residual oil on the surface of the film was wiped off with a paper towel and the weight (mg) of the test film was measured again. The change in the weight of the film due to impregnation of the mineral oil was used to determine the amount of oil absorption per unit area (cm<sup>3</sup>/cm<sup>2</sup>).

(2) Evaluation of water absorption

After measuring the weight (mg) of the test film, it was impregnated with tap water. After standing for one minute, the residual water on the surface of the film was wiped off with a paper towel and the weight (mg) of the test film was measured again. the change in the weight of the film due to impregnation of the tap water was used to determine the amount of water absorption per unit area (cm<sup>3</sup>/cm<sup>2</sup>).

The results of the evaluation tests are summarized in the below-described Table 1.

Example 8

The method described in Example 7 was repeated. For this example, however, the following starting material was melt mixed in the amounts listed.

Polypropylene resin (available from Union Carbide Co. under trade name "SD45")	58.0 parts
Mineral oil (available from Amoco Oil and Chemical Co. under trade name "White Mineral Oil #31")	35.0 parts
Organic nucleating agent (available from Hoechst Celanese under trade name "Blue P-526")	5.0 parts
Surface active agent (available from Hoechst Celanese under trade name "Hostastat System E5952")	2.0 parts

5 The results of the evaluation tests are summarized in the following Table 1.

	Example 7	Example 8	Reference Example
Film thickness	35 $\mu\text{m}$	35 $\mu\text{m}$	25 $\mu\text{m}$
Void content	25%	20%	--
Interstitial volume per unit area	0.000875 $\text{cm}^3$	0.0007 $\text{cm}^3$	--
Oil absorption per unit area ( $\text{cm}^3/\text{cm}^2$ )	0.00106	0.0096	0.00032
Water absorption per unit area ( $\text{cm}^3/\text{cm}^2$ )	0.00092	0.00078	0.00038

In the above Table 1, the "Reference Example" shows the results obtained when the oil cleaning sheet (gold foil-embossed sheet) produced by Y Co. was subjected to the evaluation tests in accordance with the manner described in Example 7. As will be understood from the results of Table 1, the oil cleaning sheet according to the present invention having a hydrophilic surface can exhibit excellent functions in both of the oil absorption and the water absorption (sweat absorption), in comparison with the prior art oil cleaning sheet.

Example 9

15 The method described in Example 7 was repeated. For this example, however, to study any influence of the surface active agent on the oil absorption and water absorption (sweat absorption), different surface active agents which chemical name and trade name are described in the below-mentioned Table 2 were used in the same amount as in Example 7 to prepare oil cleaning sheets. Further,

the commercially available microporous film (untreated) and the commercially available oil cleaning sheet (gold-foil-embossed sheet) produced by Y Co. were also used for the comparison purpose. Note that the HLB value (hydrophilic-lipophilic balance) of each surface active agent and a surface tension (dyn/cm) of each coating solution having dissolved therein the surface active agent are also described in Table 2.

As a result of the evaluation tests made in accordance with the manner described in Example 7, the results summarized in the following Table 2 were obtained. In Table 2, the oil absorption means an amount of the oil absorption per unit area ( $\text{cm}^3/\text{cm}^2$ ) and the water absorption means an amount of the water absorption per unit area ( $\text{cm}^3/\text{cm}^2$ ). Further, after oil absorption and after water absorption, each oil cleaning sheet was visually inspected with regard to change in color, and the color change was classified under "excellent" (excellent change), "good" (good change) and "bad" (poor change). The results are summarized in the following Table 2.

Surface active agent		HLB	Oil absorption	Water Absorption	Change in color		Surface tension (dyn/cm)
Chemical name	Trade name				after oil absorption	after water absorption	
Sorbitan monooleat	Leodol SP-010	4.3	0.00115	0.00080	excellent	bad	29.6*
Sorbitan monostearate	Leodol super SP-S10	4.7	0.00106	0.00002	excellent	bad	37.1
Sorbitan monostearate	Leodol super SP-L10	8.6	0.00122	0.00092	excellent	excellent	29.1
Polyoxyethylene lauryl ether	Emulgen 105	9.7	0.00113	0.00085	excellent	excellent	26.8
Polyoxyethylene lauryl ether	Emulgen 109P	13.6	0.00088	0.00085	excellent	excellent	31.8
Polyoxymethylene sorbitol monolaurate	Leodol super TW-L12	16.7	0.00112	0.00094	excellent	excellent	35.8
Polyoxyethylene octylphenyl ether	Emulgen 840S	17.9	0.00111	0.00018	excellent	bad	46.0
Polyethyleneglycol distearate	Ememon 3299R	19.2	0.00125	0.00000	excellent	bad	48.9
Ammonium laurylsulfate	Emul AD-25R	--	0.00110	0.00080	excellent	excellent	32.3
Sodium dodecylbenzene sulfonate	Neopelex F-25	--	0.00120	0.00088	excellent	excellent	35.9
Lauryl betaine	Anhitol 24B	--	0.00113	0.00074	excellent	excellent	31.5
Microporous Film (untreated)		--	0.00116	0.00000	excellent	bad	--
Oil cleaning sheet by Y Co.		--	0.00032	0.00038	good	good	--



The evaluation results described in Table 2 indicate that the excellent oil absorption and water absorption (sweat absorption) desired for the present invention cannot be obtained if the used surface active agent is out of the range of the present invention, and that such results can be varied principally depending on the surface tension of the surface active agent used. Referring to the data of the surface active agent used. Referring to the data of the surface tension in Table 2, it is apparent that the surface tension of the aqueous solution of the surface active agent is desirably 36 dyn/cm or less to obtain the desired oil absorption and water absorption (sweat absorption).

As explained above, according to the present invention an oil cleaning sheet for makeup is constructed not of conventional fiber material paper but is formed of a porous film made of a plastic material, with fine voids provided in the film to cause adsorption of oils which have surfaced on the face; it is therefore possible to realize high absorption of oils, to clearly assess the absorbing effect based on the excellent transparency of the oil absorbing areas and to thus provide the user with a feeling of adequate wiping and a sense of satisfaction, while the sheet has an agreeable feel, is resistant to damage during use, and requires no inclusion of particulate bodies on the surface for improved characteristics.

Further, according to the present invention, since a hydrophilic property was applied to a surface of the porous film of the plastic material, remarkable effects that a large amount of the sweat and skin oil dissolved therein on the face can be absorbed in the oil cleaning sheet, in addition to the above effects such as excellent absorption of the skin oil, notable transparency indicative of easy confirmation of oil absorption, and toughness. The sweat absorption effect is particularly important in the summer season in which remarkable sweating is unavoidable. Using the oil cleaning sheet of the present invention, undesirable adhesion of the sheet to the skin can be effectively prevented, thereby eliminating an uncomfortable feeling, in addition to complete removal of the sweat from the face. Furthermore, since the surface active agent can additionally act as an antistatic agent, the used oil cleaning sheet can be discarded without disadvantage concerning its adhesion to the hand.

What is claimed is:

1. An oil cleaning sheet for makeup, characterized by comprising a porous stretched film made of a plastic material.

2. An oil cleaning sheet for makeup according to claim 1, characterized in that the interstitial volume per unit area of said porous stretched film is in the range of 0.0001-0.005 cm<sup>3</sup> as calculated by the following equation:

interstitial volume per unit area = [film thickness (cm) x 1 (cm) x 1 (cm) x void content (%) ] / 100 (where the void content is the percentage of voids in the porous film).

3. An oil cleaning sheet for makeup according to claim 1 or 2, characterized in that the void content of said porous stretched film is in the range of 5-50% and the film thickness is in the range of 5-200 μm.

4. An oil cleaning sheet for makeup according to claim 1 in which at least one surface of said porous stretched film contains a hydrophilic liquid-absorbing substance which is at least partly distributed on the surface.

5. An oil cleaning sheet for makeup according to claim 4 in which said liquid-absorbing substance is distributed on the surface of said stretched film by coating the same, after said stretched film was produced.

6. An oil cleaning sheet for makeup according to claim 4 in which said liquid-absorbing substance is incorporated into said stretched film during production thereof, so that said substance is at least partly exposed in a surface of said film.

7. An oil cleaning sheet for makeup according to anyone of claims 4 to 6 in which said porous stretched film has a liquid absorption capacity, in terms of the amount of water absorbed, of 0.00003 to 0.005 cm<sup>3</sup> per unit area.

8. An oil cleaning sheet for makeup according to anyone of claims 4 to 7 in which an aqueous solution of said liquid-absorbing substance has a surface tension of 15.0 to 36.0 dyn/cm.

# INTERNATIONAL SEARCH REPORT

Inter      nal Application No  
PCT/US 98/25736

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6      A47K7/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6      A47K      A61K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 061 709 A (BEECHAM WALTERS J E) 20 May 1981 see the whole document	1
A	US 5 144 744 A (CAMPAGNOLI ANTONIO) 8 September 1992 see the whole document	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

11 March 1999

Date of mailing of the international search report

19/03/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5816 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vrugt, S

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/25736

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2061709 A	20-05-1981	NONE	
US 5144744 A	08-09-1992	NONE	

## PATENT COOPERATION TREATY

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Assistant Commissioner for Patents  
United States Patent and Trademark  
Office  
Box PCT  
Washington, D.C.20231  
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 10 August 1999 (10.08.99)	
International application No. PCT/US98/25736	Applicant's or agent's file reference 53859PCT1A
International filing date (day/month/year) 04 December 1998 (04.12.98)	Priority date (day/month/year) 05 December 1997 (05.12.97)
Applicant KONDO, Kazunori et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

24 June 1999 (24.06.99)

☐ in a notice effecting later election filed with the International Bureau on:2. The election ☒ was☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer F. Zotomayor
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference D 1709 PCT	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/US98/25736	International filing date (day/month/year) 04/12/1998	Priority date (day/month/year) 05/12/1997
International Patent Classification (IPC) or national classification and IPC A47K7/00		
Applicant MINNESOTA MINING AND MANUFACTURING COMPANY et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This REPORT consists of a total of 5 sheets, including this cover sheet.

- ☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 2 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☒ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand  24/06/1999	Date of completion of this report  - 3. 02. 00
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer  Papadimitriou, S  Telephone No. +49 89 2399 2118 

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/US98/25736

## I. Basis of the report

1. This report has been drawn on the basis of (*substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.*):

### Description, pages:

1-24 as originally filed

### Claims, No.:

1-8 as received on 17/01/2000 with letter of 13/01/2000

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages:  
☐ the claims, Nos.:  
☐ the drawings, sheets:

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

### 1. Statement

Novelty (N)	Yes: Claims 1-8
	No: Claims
Inventive step (IS)	Yes: Claims 1-8
	No: Claims
Industrial applicability (IA)	Yes: Claims 1-8
	No: Claims



**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/US98/25736

---

**2. Citations and explanations**

**see separate sheet**

**VII. Certain defects in the international application**

The following defects in the form or contents of the international application have been noted:

**see separate sheet**

**Re Item V**

**Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

**1) State of the art**

Reference is made to the following documents:

D1: GB-A-2 061 709

D2: US-A-5 144 744

D3: US-A-4 532 937 (furnished by the applicant with letter of 20.09.99)

**2) Independent claim 1**

**Best prior art:** D1, teaching an oil cleaning sheet for make up, cf. page 1, lines 5-7 and figures 1 and 2, comprising a porous stretched film 2 made of a plastics material, cf. page 1, lines 68-71 and figures 1 and 2.

**Problem:** The objective problem underlying the present application is the provision of an oil cleaning sheet comprising a stretched, porous sheet having a void size allowing efficient absorption of skin oil.

**Solution:** The void size of the film of the claimed cleaning sheet lies in the range 0.2 to 5 micrometres.

D1 describes a make-up cleaning pad comprised by a disc-shaped liquid sorbent material covered by a plastic stretched covering 2, this document being silent on any void sizes.

D2 describes a bath sponge which is made of polyethylene netting, this document being silent on any void sizes.

D3 teaches the provision of a microporous polypropylene film sheet for sebum collection from the forehead of a user, this document teaching as preferable a pore size of less than about 0.1 micron, cf. col. 4, lines 12-13.

Consequently, the subject-matter of independent claim 1 complies with the provisions of Article 33(1) PCT.

2) Dependent claims 2 to 8

These dependent claims define various embodiments of the sheet specified in independent claim 1 and also comply with the provisions of Article 33(1) PCT.

**Re Item VII**

**Certain defects in the international application**

1) Description

- 1.1) The description is not in conformity with the claims as required by Rule 5.1(a)(iii) PCT. Moreover, the void size specified in subsisting independent claim 1 is disclosed in the pertinent descriptive passage as preferable, cf. page 8, line 18. Consequently, the provisions of Article 6 PCT are not complied with.
- 1.2) Contrary to the requirements of Rule 5.1(a)(ii) PCT, the relevant background art disclosed in the document D1 is not mentioned in the description, nor is this document identified therein.
- 1.3) The references to unpublished specifications should have been deleted from pages 2 and 3 of the description.